




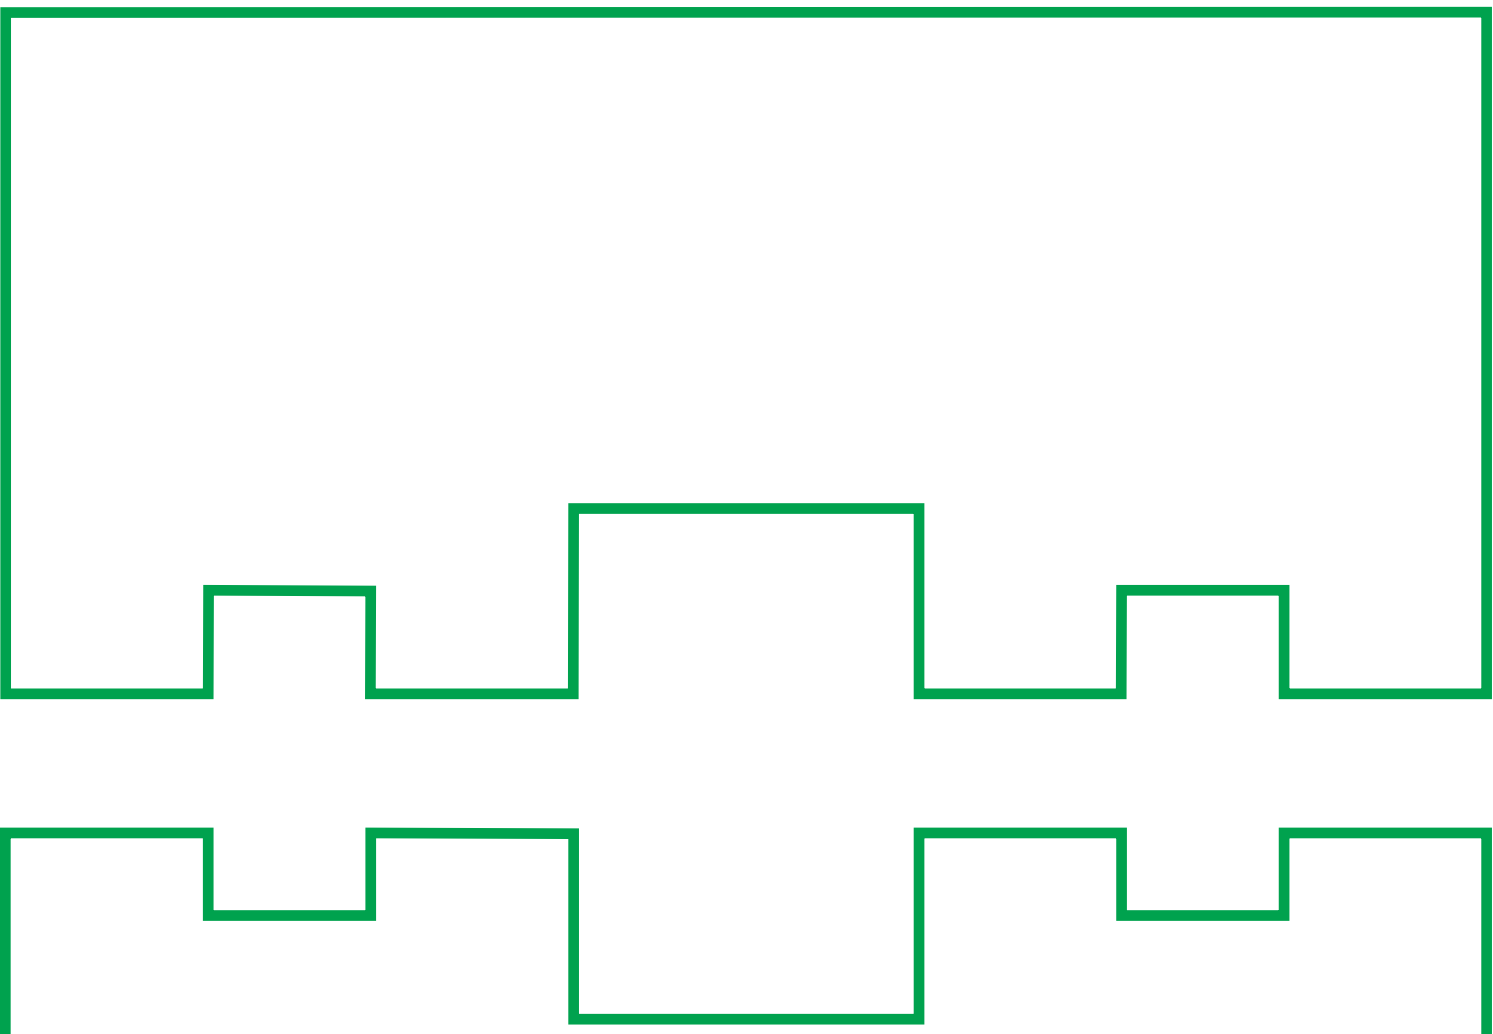

H-HC CABINET

SEALS

H-HC Frame

The H-HC frame is manufactured with flange. This flange can be placed centrally in the frame or offset on one side. Available in two different widths; 60 and 120 mm wide (internal).

CHARACTERISTICS

- To be installed (bolted) inside or outside the panels and cabinets.
- To be sealed with HTS standard HF blocks and compression system, stayplates and lubricant.
- Materials: Stainless steel, mild steel.
- Compression tool required for installation.
- Customizable flange and frame sizes (the latter according to our standard sizes).

