


STAYPLATES

Stayplates ensure the blocks in a HTS rectangular system (tolerant and blank ones) are fixed in position after compression. A stayplate should be placed above each complete row of insert/filler blocks. However, never on the last top row (underneath the compression plate) and never below the last bottom row of blocks.


- Available in AISI 304 stainless steel. AISI 316 and other materials under request.
- High pressure stayplates (Ref.931/P) are to be used in applications where the pressure requirement is greater than 3.5 bar.
- Ex available under request.



HTS standard Stayplate

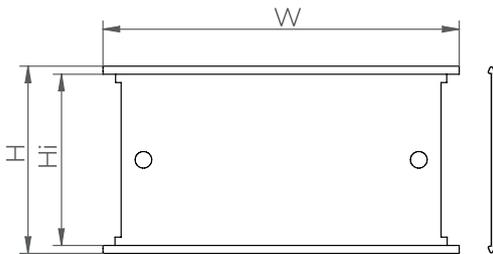

HTS high pressure Stayplate

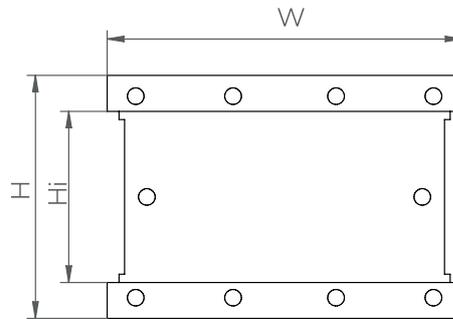

| DESCRIPTION | W (mm) | H (mm) | Hi (mm) |
|-------------------------------------|--------|--------|---------|
| Stayplate 931 60mm | 68 | 68 | 62 |
| Stayplate 931 120mm | 128 | 68 | 62 |
| High Pressure Stayplate 931/P 120mm | 128 | 88 | 62 |

EMC MARKING TOOL

The EMC Marking tool (Ref. 970) is used to facilitate installation of cables within an EMC system.

This re-usable tool is designed to mark the area where cable sheath should be removed to wrap the copper tape, and to mark the cable in both ends of the frame to guarantee that blocks a cable copper tape are aligned.

