


HBRST TREFOIL

HTS HBRST Trefoil is a round sealing solution for multiple cables passing through corrugated pipes or ducts casted in concrete manholes/pits.

The seal is formed by tightening the compression bolts which expand the system radially with no need of a compression system.

CHARACTERISTICS

- Manufactured in elastomer polymer with stainless steel front and back plates.
- HBRST is always supplied as an open system. It enables to be installed after cable/pipe installation.
- Watertight protection. DNV tested catastrophic pressure 2 bar according to DNV-CP-0165 Approval Program.
- No extra tools are required for its installation.
- Working Temperature -35 °C to +120 °C
- Estimated life time at 20 °C = 15 years.

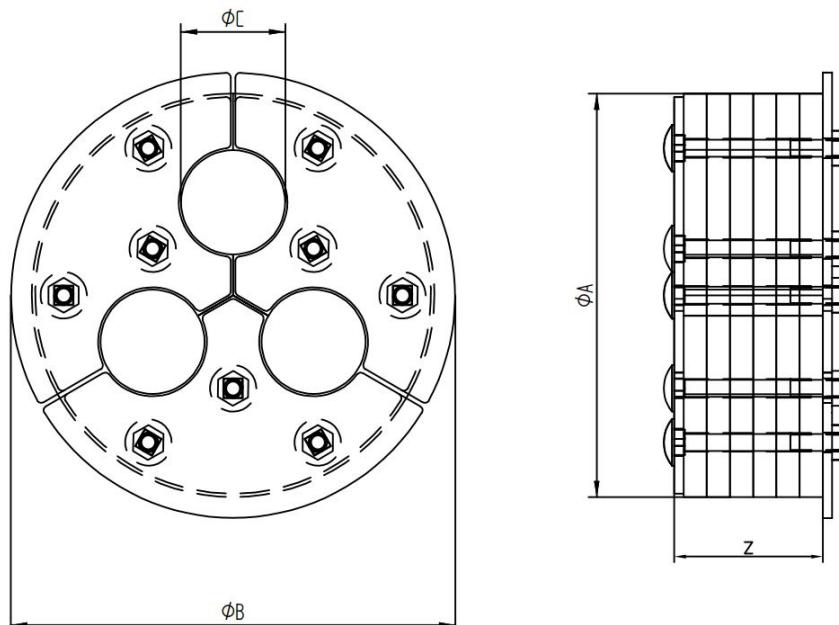

ϕA - ϕB depends on corrugated tube internal diameter.

ϕC depends on cables' size

Remark: To ensure proper sealing of the system, the client must define the internal diameter of the corrugated pipe based on the actual duct dimensions on site. Also the OD of the cables to be sealed.