





DUCT SEALS

INSTALLATION GUIDES


HBRST Installation guide:

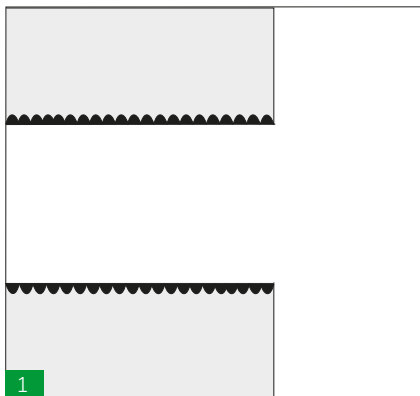


1
Ensure the tube is securely fitted and free of any looseness or gaps with the wall.

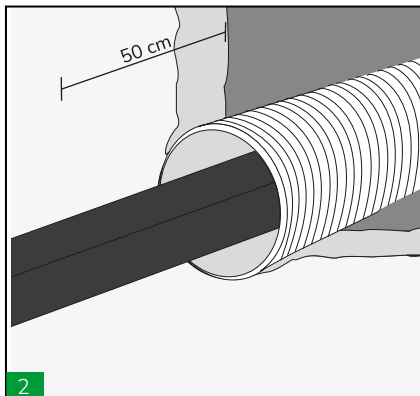


2
Confirm that cables enter the wall perpendicularly for at least 50 cm before reaching the tube.

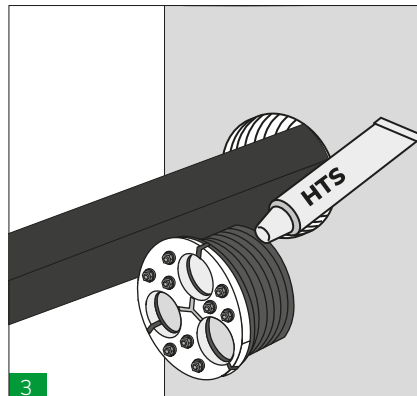



3
Lubricate the inside of the HBRST where it contacts the cable, also lubricate the outside where it contacts the tube.

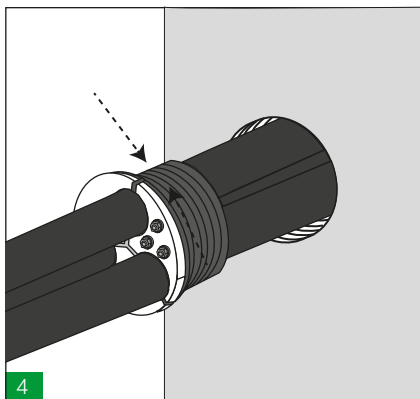



4
Open the HBRST and install it around the cable(s).

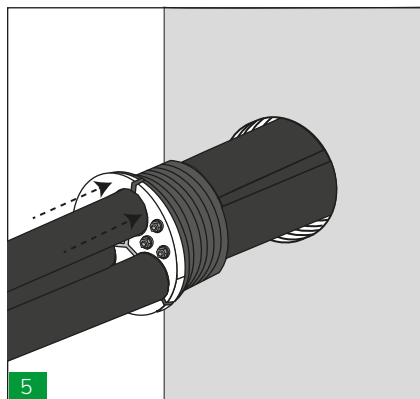

5
Carefully insert the HBRST into the tube. Ensure the HBRST is fully inserted so that the front plates are in direct contact with the tube.

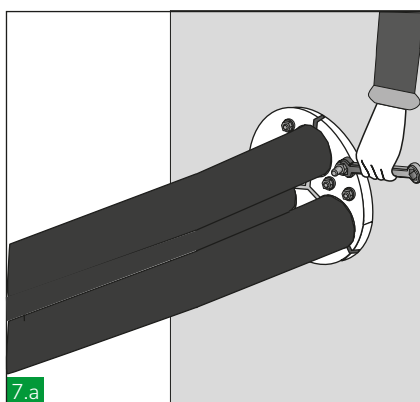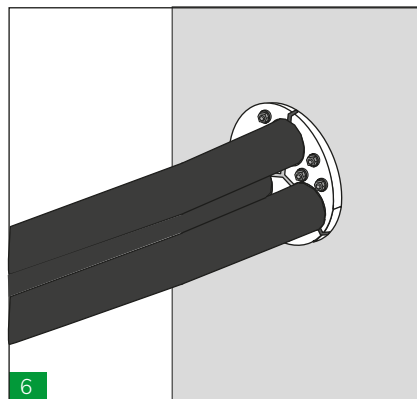

7.a
Tighten the screws incrementally, approximately 2 mm at a time, following the sequence shown in the picture. Continue tightening until the system is fully compressed to seal the cable/pipe effectively.

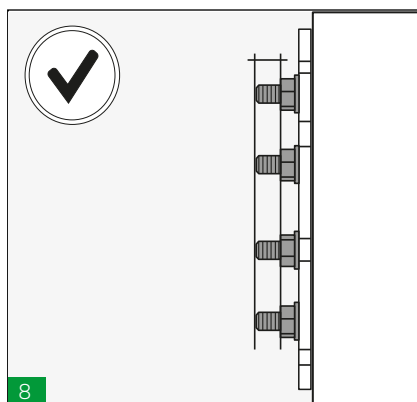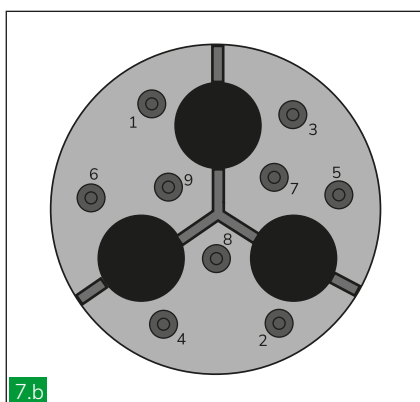

8
Conduct a final visual inspection of the installation, ensuring the following:
The tightening has been uniform.
The rubber seal fully embraces the cable and protrudes slightly through the front plate.